

EL (EYE LEVEL) DRYING SYSTEMS

Semi-enclosed unit where the supplied blower is contained within a stainless steel enclosure. Additional protection to the blower is given by mounting the enclosure to a leg kit that can be easily positioned either to the side or directly above the conveyor/ filling line.

Configuration: 'EL' Eye Level Drying System


Product Category: All bottles/ cans/ pouches etc.

Application area: Drying specific or complete areas on high speed lines

'EL' system options:

Option	Blower Specification	Airknife Length	ACI Part Number
1	15kW EP10A Blower (18-19,000 rpm)	2 x 1200mm St St Airknives each fitted with x2 flexible nozzles	EL-01 15KW
2	15kW EP10A Blower (18-19,000 rpm)	2 x JetPlates, 2 x 320mm St St Airknives	EL-02 15KW
3	15kW EP10A Blower (18-19,000 rpm)	Can Tunnel (4 slot) with 2 x 500mm St St Airknives	EL-03 15KW

'EL' illustrated with stainless steel airknives:

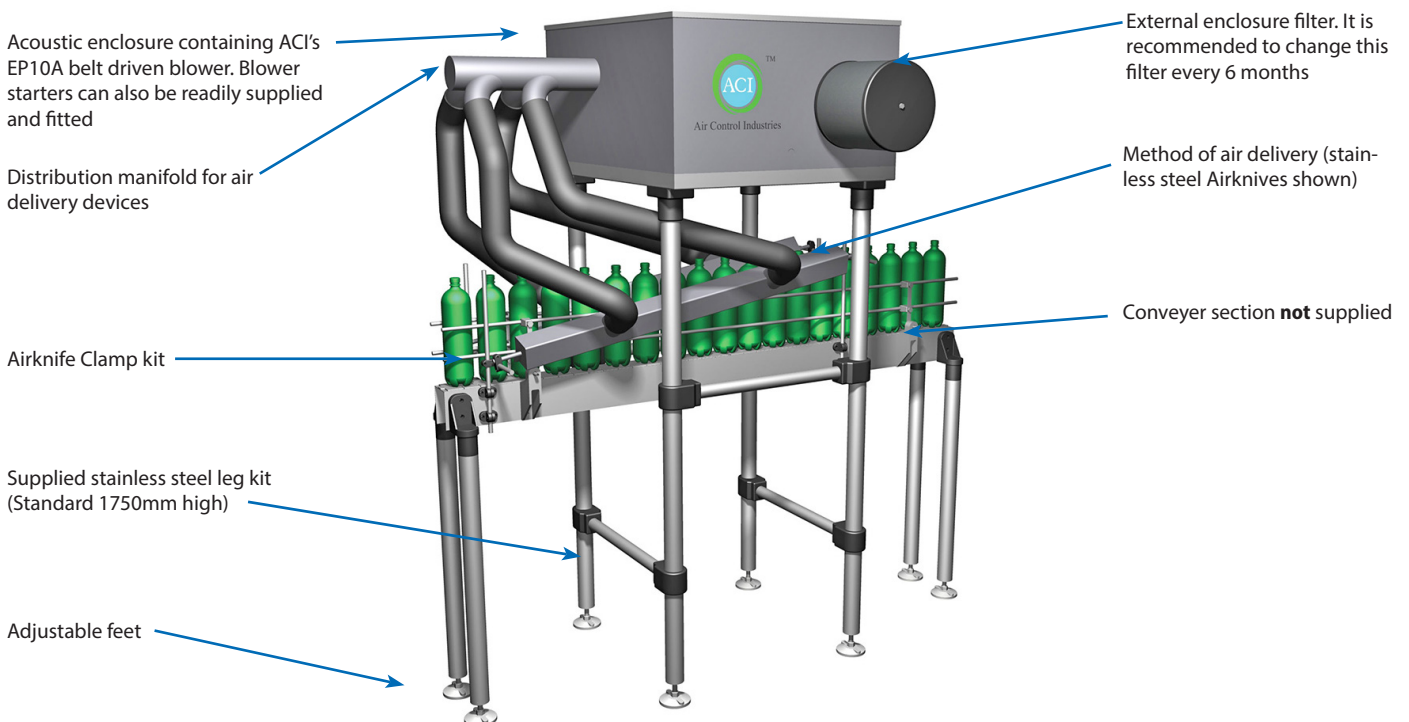


EL (EYE LEVEL) DRYING SYSTEMS

'EL' system description:

ACI's 'EL' Drying System configuration protects the compact blower from any spray contamination emanating from the air delivery device. Noise levels are approximately 90 dB(A).

'EL' outline drawing (shown with Can Tunnel & Airknives):

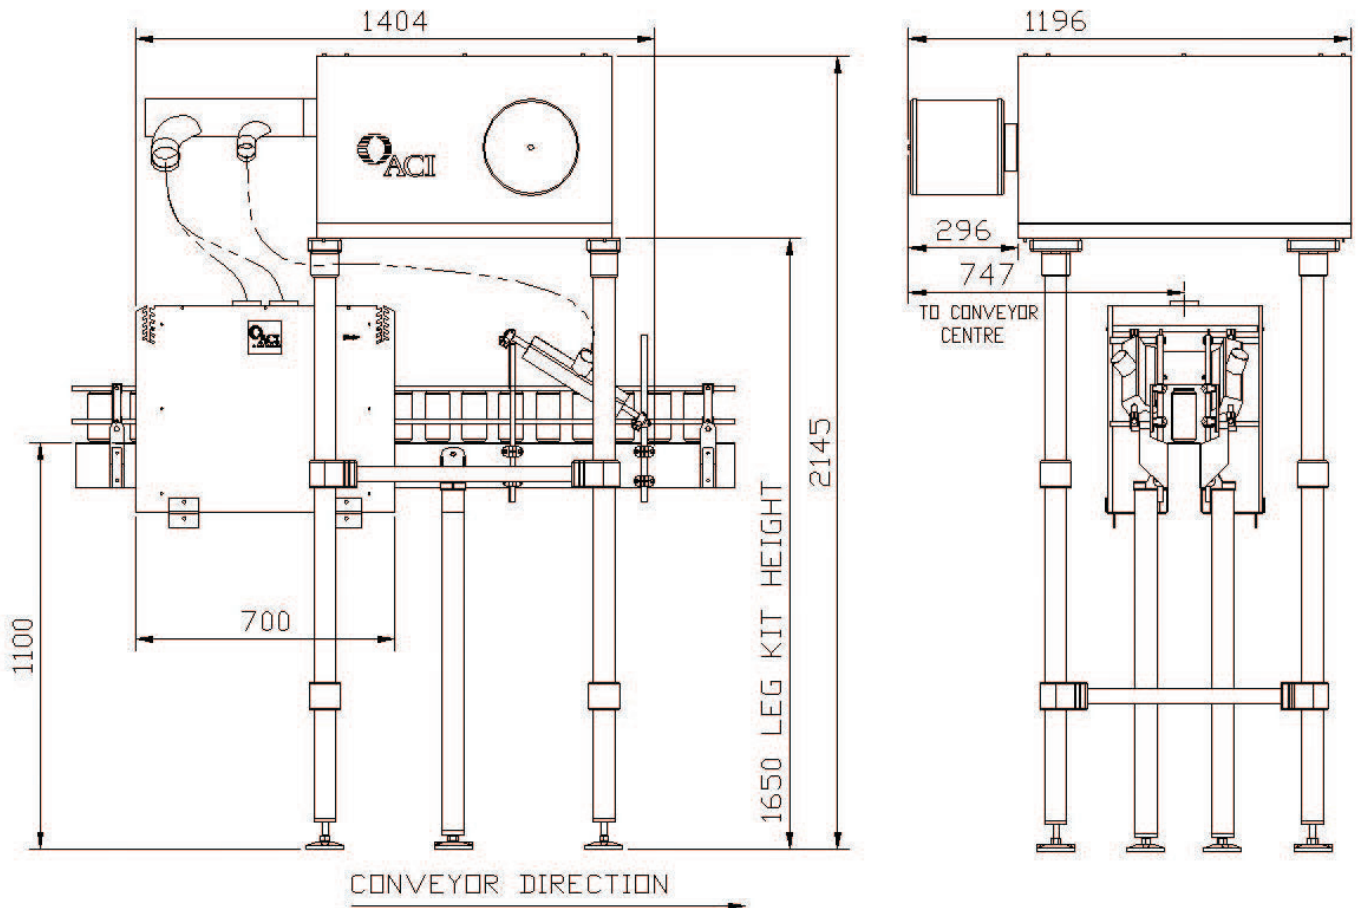

Other options:

These will include the following:

- **Air delivery devices**
ACI can offer a number of alternatives to delivering the air to the product, including Stainless Steel airknives, JetPlates, Can Tunnels, Neck and Cap Dryers.
- **Ducting:**
In addition to standard flexible hose, both solid stainless or galvanised steel are available.
- **Starters:**
ACI are able to offer a range of starters for all budgets.
- **Enclosures and pedestals:**
A number of mounting configurations/ blower enclosures are available. Detailed advice can be given to customers on application by ACI's Technical Sales Department.

Please note (1) - all drawings measurements are in millimeters (mm)
Please note (2) - above technical specifications are subject to change