


# Drift eliminators H130

## Specifications

- Droplet separators most suitable for horizontal installation
- Very often used in water cooling towers
- Use: including in water cooling towers and scrubbers
- The blocks can be sawed with a simple hand saw to fit the required installation opening
- High efficiency at low pressure
- Higher temperature resistance (to 95°C) available
- Also available at double height – H260

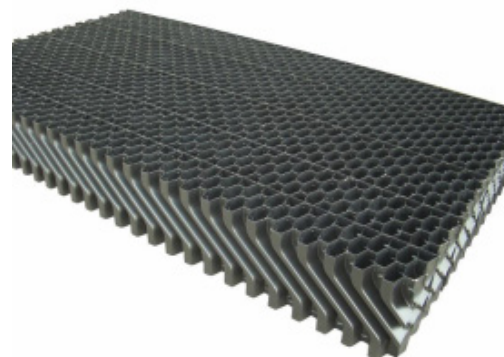

Plastic material	PVC	PP
Max. temperature (°C)	60	From -20°C to 70°C 80°C brief Higher temperature resistance available on request
Dry weight (kg/m <sup>3</sup> )	+/- 6 kg	
Max. air speed (m/s)	4,5	
Drift losses (%)	< 0,0005 According to test method CTI ATC-140 and Eurovent standard OM-14-20019	
Pitch (mm)	18	
Recommended distance between support (mm)	1000	

Dimensions	Standard (other on demand)	
Height (mm)	125	
Width (mm)	600	
Length (mm)	1200	2400

## Pressure drop

