


Drift eliminators R40

Specifications


- Cleanable droplet collector made up of separate strips and spacers - any dimensions possible
- **Applications:** Cooling towers, cooling batteries, gas scrubbers, humidification installations, air blast shafts
- **Fitting:** Horizontally and vertically
- **Spacers:** 25mm to create a droplet collector with a strip distance of 25mm
33mm to create a droplet collector with a strip distance of 33mm
- **Denomination:** R40 blade with 25mm spacers: R425 drop eliminator
R40 blade with 33mm spacers: R433 drop eliminator
- These profiles can be used with inversed current as air flow stabilizers (33mm spacer should be used)



Plastic material	Polypropylene (PP) reinforced with talcum powder
Max. temperature (°C)	70°C continuously
Optimal air speed (m/s)	
- 25mm spacer	From 1,5 to 4
- 33mm spacer	From 2,5 to 4

Dimensions	
Max. length (mm)	6020 ± 15
Fitting depth (mm)	105

Pressure drop

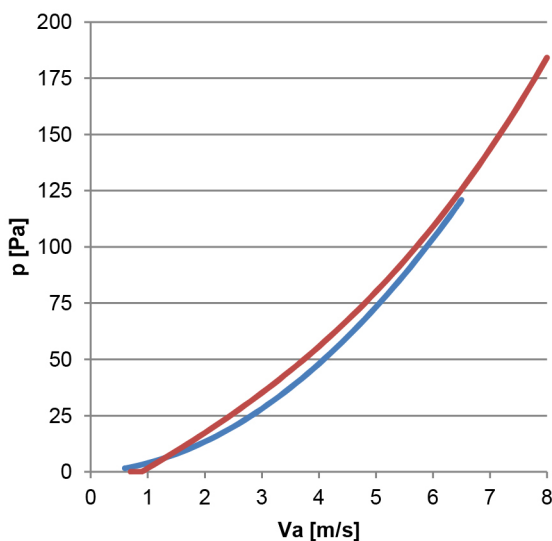

Boundary droplet size

